

# ANDROMEDA 2.0


## Dual-Glass BIPV Series SPICN6(LDG)-60/IH

355W|360W



### 产品特性 FEATURES

- 0~+5W功率公差  
0~+5W Power Tolerance
- IBC 技术无正面栅线，更好受光  
IBC technology no busbar on front side to block sunlight
- 30年线性功率质保  
30-year linear power warranty
- 10年的材料及工艺质保  
10-year material and workmanship warranty
- 优异的弱光性能  
Excellent Low Light Performance
- 隔热、隔绝噪音  
Heat-proof and noise-proof
- 无电致诱导衰减及光致衰减  
Anti-PID and ZERO LID
- 优异的功率温度系数  
Excellent Temperature Coefficient

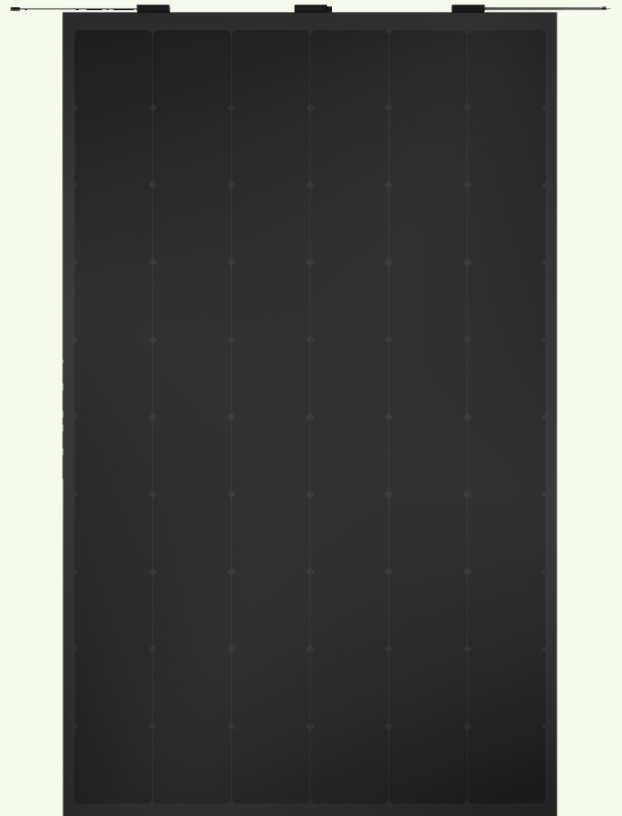

IEC 61215  
IEC 61730  
Regular Production  
Surveillance  
www.tuv.com  
ID 141902643



### 国家电投集团

国家电投集团在2023年财富世界500强中排名中位列第262位，是一家大型的综合能源企业，在全球范围内持有包括水电、火电、核电、光伏、风电等资产，总计超过200GW，其中光伏电站持有量超过68GW(截至2023年上半年)，连续多年全球第一。

### About SPIC Group

State Power Investment Corporation (SPIC)- FORTUNE GLOBAL 500 company, ranking 262nd in 2023, one of the integrated energy group in China that holds assets of hydropower, thermal power, nuclear power and new energy simultaneously. Hold and operate over 68GW photovoltaic projects, ranking first in the world (As of end 2023H1).





## 电性能参数 Electrical Parameters(STC\*)

组件型号 Module Type	SPICN6(LDG)-60-355/IH	SPICN6(LDG)-60-360/IH
峰值功率 Maximum Power (Pmax/W)	355	360
最大功率电压 Maximum Power Voltage (Vmpp/V)	71.8	72.0
最大功率电流 Maximum Power Current (Impp/A)	4.95	5.00
开路电压 Open Circuit Voltage (Voc/V)	83.8	84.4
短路电流 Short Circuit Current (Isc/A)	5.36	5.40
组件效率 Module Efficiency	19.5%	19.8%

## 附加价值 Additional Value


## 组件尺寸 Dimensions(Units:mm)

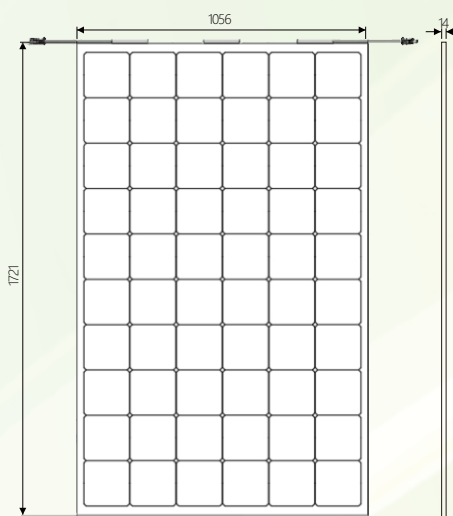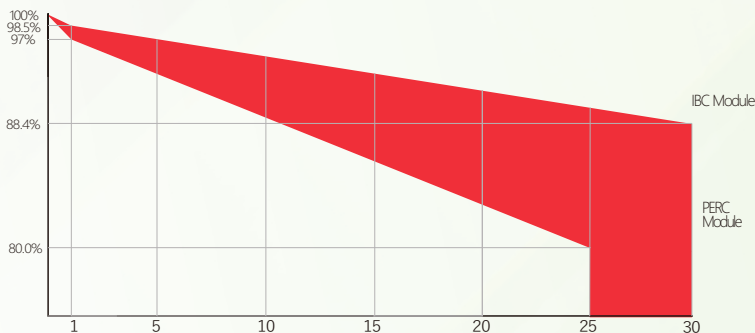

## 机械参数 Mechanical Parameters

电池类型 Cell Type	N型IBC 166x83mm (半片) N-IBC 166x83mm(Half-Cell)
电池数量 No. of Cells	120 (6×20) (或定制设计) 120(6×20) (Or Custom Design)
接线盒 Junction Box	防护等级IP68 IP68 Rated
缆线 Cables	TÜV 1×4mm <sup>2</sup> ,300mm (或定制设计) TÜV 1×4mm <sup>2</sup> ,300mm (Or Custom Design)
组件玻璃 Glass	6mm+6mm 钢化玻璃 6mm+6mm Tempered Glass
封装材料 Encapsulation	PVB
连接器 Connector	MC4兼容 MC4 Compatible
组件尺寸 Dimension	1721×1056×14mm (或设计定制) 1721×1056×14mm (Or Custom Design)
组件重量 Weight	59±0.5kg

## 电流-电压曲线 I-V Curves(360W)

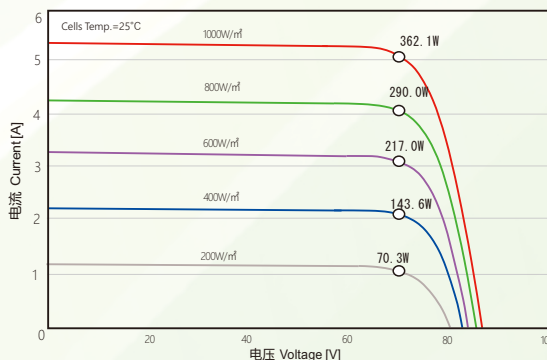

## 运行条件 Operating Conditions

最大系统电压 Maximum System Voltage	1000V DC(IEC)
最大额定电流 Maximum Rated Current	12A
运行温度 Operational Temperature	-40~+85°C
正面机械载荷 Mechanical Test Load (Front)	5400Pa
背面机械载荷 Mechanical Test Load (Rear)	2400Pa

## 温度系数 Temperature Characteristics (STC)

Pmax	%/°C	-0.290
Voc	%/°C	-0.246
Isc	%/°C	+0.046

## 包装信息 Packaging Configuration

每托组件数 No. of Modules Per Pallet	EA	24
40ft高柜包含托数 No. of Pallets Per 40ft HQ container	EA	16
40ft高柜包含组件数 No. of Modules Per 40ft HQ container	EA	384



青海黄河上游水电开发有限责任公司西宁太阳能电力分公司  
QINGHAI HUANGHE HYDROPOWER DEVELOPMENT CO., LTD. XINING SOLAR POWER BRANCH  
青海省西宁市城东区金硅路4号  
No.4 Jingui Road, Chengdong District, Xining City, Qinghai Province, China  
spicsolar.com  
spicsolar@spic.com.cn

本产品规格书如有任何更改, 恕不另行通知。  
最终解释权归国家电投黄河公司西宁分公司所有

Product specifications are subject to change without notice

© 2024 SPIC Solar Power Branch. All rights reserved